

This is the submitted version of the following article: Cerdà, AP; Gea, T and Sánchez, A. *Towards a competitive solid state fermentation: cellulases production from coffee husk by sequential batch operation and role of microbial diversity* in Science of the total environment (Ed. Elsevier), vol. 589 (July 2017), p. 55-65, which has been published in final form at

DOI 10.1016/j.scitotenv.2017.02.184

© 2017 This manuscript version is made available under the CC-BY-NC-ND 4.0 license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

1 **Towards a competitive solid state fermentation: cellulases production from coffee husk**
2 **by sequential batch operation and role of microbial diversity.**

3

4 Alejandra Cerda¹, Teresa Gea^{1*}, M Carmen Vargas-García², Antoni Sánchez¹.

5

6 ¹GICOM Research Group, Department of Chemical, Biological and Environmental
7 Engineering, School of Engineering, Edifici Q, Universitat Autònoma de Barcelona, 08193
8 Bellaterra, Barcelona, Spain.

9 ²Unit of Microbiology, Department of Biology and Geology, CITE II-B, University of
10 Almeria, Agrifood Campus of International Excellence ceiA3, 04120 Almeria, Spain

11

12 *Corresponding Author

13 e-mail: teresa.gea@uab.cat

14 Tel. +34-935812694

15

16

17

18

19

20

21

22 **Abstract**

23 The cost of cellulases is the main bottleneck for bioethanol production at commercial scale.
24 Solid-state fermentation (SSF) is a promising technology that can potentially reduce
25 cellulases cost by using wastes as substrates. In this work, a SSF system of 4.5L bioreactors
26 was operated continuously by sequential batch operation using the fermented solids from one
27 batch to inoculate the following batch. Coffee husk was used as lignocellulosic substrate.
28 Compost was used as starter in the first batch to provide a rich microbiota. Two strategies
29 were applied: using 10% fermented solids as inoculum in 48h batches (SB90) and using 50%
30 solids in 24h batches (SB50). A consistent and robust production process was achieved by
31 sequential batch operation. Similar cellulase activities around 10 Filter Paper Units per gram
32 of dry solids were obtained through both strategies. Microbial diversity in the starting
33 materials and in the final fermented solids was characterized by next generation sequencing.
34 Microbial composition of both fermented solids was similar but the relative abundance of
35 families and species was affected by the operation strategy used. Main bacteria in the final
36 solids came from compost (families *Sphingobacteriaceae*, *Paenibacillaceae* and
37 *Xanthomonadaceae*), while main fungi families came from coffee husk (families
38 *Phaffomycetaceae*, *Dipodascaceae* and two unidentified families of the class of
39 *Tramellomycetes*). There was a high presence of non-identified mycobiota in the fermented
40 solids. Main identified species were the bacteria *Pseudoxanthomonas taiwanensis* (12.3% in
41 SB50 and 6.1% in SB90) and *Sphingobacterium composti* (6.1 % in SB50 and 2.6% in SB90)
42 and the yeasts *Cyberlindnera jardinii* and *Barnettozyma californica* (17.8 and 4.1%
43 respectively in SB50 and 34 and 9.1% in SB90), all four previously described as
44 lignocellulose degraders. The development of these operational strategies and further
45 biological characterization of the end product could eventually benefit the process economics

46 by providing a standard and specialized inoculum for a continuous SSF for cellulases
47 production.

48 **Keywords:** solid-state fermentation, cellulases, sequential batch reactor, microbial diversity,
49 organic wastes.

50

51 1. Background

52 Increasing global demand for energy has resulted in the need for new and renewable
53 energy forms such as bioethanol. In this sense, the second and third generation of bioethanol
54 has gained great attention over the last years, due to the potential use of lignocellulosic
55 biomass as raw material, avoiding the use of pure substrates such as starch (Behera et al.,
56 2016, Kuhad et al., 2016). The use of agricultural by-products or wastes presents great
57 advantages in comparison with pure substrates from the points of view of the energy balance
58 and the environmental impact (Olofson et al., 2008).

59 In general, bioethanol production from lignocellulosic materials consists of a pretreatment
60 to hydrolyse lignin and hemicellulose-based materials, followed by an enzymatic hydrolysis
61 of cellulose and a final yeast-based fermentation of the released free sugars. From these
62 stages, enzymatic hydrolysis appears as the main bottleneck for the production of bioethanol
63 at commercial scale. This is mainly due to the cellulases production process, which accounts
64 up to 40% of total costs (Arora et al., 2015). Moreover, some studies performed on the life
65 cycle assessment of this process conclude that cellulase production requires a higher energy
66 input than cellulose to ethanol conversion itself (Heather and Sabrina, 2009).

67 Cellulases used to break down cellulose into fermentable sugars are commercially
68 produced by submerged fermentation mainly from pure substrates (McMillan et al., 2011).
69 Despite the fact that the use of commercial cellulases potentially provides high sugar yields,
70 its use is far of being a cost-effective alternative. The enzymatic preparations must be
71 purchased continuously and its production process is complex and energy intensive (Lever,
72 2005). Submerged fermentation normally includes sterilization systems, control and
73 monitoring of different parameters such as temperature, pH and dissolved oxygen, which
74 implies the use of high amounts of energy in the process (Tolan and Foody, 1999). Thus,
75 cellulases production should be optimized to avoid the high cost of commercial enzymes, and

76 to make the bioethanol production a sustainable process. Many aspects have been studied for
77 the improvement of cellulases production, such as substrate (El-Barky et al., 2015), inoculum
78 selection (Eichorst et al., 2013, Mihajlovski et al., 2015) and alternative fermentation
79 strategies such as solid-state fermentation (Lever, 2005, Olofsson et al., 2008), among others.

80 Solid state fermentation (SSF) of lignocellulosic biomass presents important advantages
81 over conventional submerged fermentation such as reduced energy requirements, high
82 productivity and less inhibitory effects for enzymatic production (Kuhad et al., 2012).
83 However, its application at the industrial scale appears to be hindered by technology issues,
84 such as reactor design, heat transfer issues or sterilization costs (Mitchell et al., 2006, Pessoa
85 et al., 2016). To overcome some of these constrains, our research group have proposed to
86 work in a composting-like process, under near adiabatic conditions using the native
87 microbiota for the production of hydrolytic enzymes such as proteases (Abraham et al.,
88 2013). However, a successful strategy for enzymatic production includes a proper selection of
89 microorganisms to improve productivity coupled with these engineering aspects of SSF
90 (Kuhad et al., 2016). In this context, we have proved in the same SSF configuration that
91 thermophilic strains inoculated in non-sterile wastes were able to compete with
92 autochthonous microbiota and significantly increase proteases activity (El-Bakry et al.,
93 2016). Furthermore, it has been proven that it is possible to select and adapt compost
94 microorganisms to use cellulosic materials as substrate, which could potentially increase the
95 cellulolytic degradation capacity (Eichorst et al., 2013). These facts suggest the possibility to
96 adapt a complex inoculum to degrade lignocellulosic materials in an easily scalable process
97 to provide a standardized cellulase production process. The obtained enzymatic pool or even
98 the fermented solids obtained by SSF can be potentially used in the hydrolysis step of the
99 bioethanol production as suggested by some authors (Farinas, 2015). Pensupa et al. (2013)
100 found a higher glucose release using cellulase obtained by SSF than commercial preparations

101 while Lever et al., (2010) successfully applied crude lignocellulosic extracts for bioethanol
102 production.

103 Coffee husk (CH) is a lignocellulosic waste obtained in the roasting process of coffee.
104 More than eight million tons of coffee beans are produced annually world-wide, 18% of
105 which is obtained as CH (Murthy and Nadiu, 2012). Currently, coffee husk is disposed as an
106 industrial waste and managed through incineration, landfill or composting in the best case.
107 Shemekite et al. (2014) demonstrated the suitability of the native populations in coffee husk
108 for biodegradation, correlating several enzymatic activities with the fungi communities. The
109 current change of paradigm into the circular economy framework leads to an increasing
110 interest in biomass as feedstock for new processes. Coffee husk has attracted interest of
111 researchers worldwide as the substrate for solid-state fermentation and other processes to
112 obtain valuable products (Mussatto et al., 2011; Narita and Inouye, 2014).

113 Despite all of the above advances, still the setting up of a long term SSF operation in
114 continuous or semi-continuous regime remains a challenge with few attempts reported at lab
115 scale using restrictive conditions, such as the use of pure strains under initial sterile
116 conditions (Cheirsilp et al., 2015, Astolfi et al., 2011). Lately, a novel and more suitable
117 approach has been assessed for enzymatic production by SSF using a sequential batch
118 operation with non-sterile wastes, showing promising applications (Cerda et al., 2016).

119 The aims of this work are: i) to assess two different operational strategies for the
120 development of a continuous SSF using coffee husk as a model substrate and ii) to produce a
121 specialized inoculum for cellulases production and assess its microbial biodiversity. This
122 process of optimization for cellulases production will provide a standardized and cost-
123 effective technology with evident benefits for bioethanol production.

124

125 2. Materials and methods

126 2.1 Raw material

127 Coffee husk (CH) was kindly provided by Marcilla S.A (Mollet del Vallés, Barcelona,
128 Spain). Compost (C, from source-selected organic fraction of municipal solid waste) was
129 obtained from the municipal solid waste treatment plant Ecoparc de Montcada (Montcada,
130 Barcelona, Spain). All materials were stored frozen (-18°C) until use. The full
131 characterization of both materials is presented in Table 1.

132

133 2.2 Solid-State Fermentation

134

135 2.2.1 Preliminary experiments at the lab scale

136 Preliminary SSF experiments were performed in order to assess the inoculum size and
137 the time for maximum cellulase production. Non sterile coffee husk was mixed with compost
138 as inoculum in 0, 10, 20, 50 and 100% (w/w) ratio. Wood chips were added in a 1:1 (v/v)
139 ratio as bulking agent. Fermentation was carried out in triplicates for 4 days at 37°C in 500
140 mL Erlenmeyer flasks with 90 g of the mixture CH and C using continuous aeration of 20 mL
141 min⁻¹ and oxygen monitoring.

142

143 2.2.2 Sequential batch operation in 4.5 L bioreactors

144 Fermentations were performed in 4.5L air-tight packed-bed reactors (adapted Dewar®
145 vessels), thermally isolated to work under near-to-adiabatic conditions (Dewar® vessels
146 provide excellent thermal isolation, minor heat exchange with the surroundings take place
147 through the airflow (in and out) and partially through the lid) . Experimental set-up is
148 presented in Figure 1. A self-made acquisition and control system was used based on
149 Arduino® and self-made software. Air was continuously supplied to the reactors by means of
150 a mass flow controller (Bronkhorst, Spain). Airflow was automatically adjusted by a

151 feedback controller (aeration range 15.8 – 31.6 L kg⁻¹ DM h⁻¹, set point 11.5% oxygen in
152 exhaust gas). Airflow, temperature and oxygen content were continuously monitored.

153 The initial mixture for the first batch in both strategies contained 90% (wb) of fresh
154 coffee husk as substrate and 10% (wb) of compost as mixed inoculum. Compost was added in
155 order to provide active biomass and mainly for the potential incorporation of diverse
156 communities able to degrade lignocellulosic materials, as reported in recent studies (Lopez-
157 Gonzalez et al., 2014). Wood chips were added as bulking agent in a ratio of 1:1 (v/v) in
158 order to provide enough porosity to promote proper oxygen transfer (Ruggieri et al., 2009).
159 Fermentations were performed with a total weight of 1.2 kg per batch.

160 Maximum cellulases activity was achieved in 48h and thus the solid retention time
161 (SRT) was established in 48h. After this first 48h batch, two fermentations were performed in
162 parallel as sequential batches by means of two different operation strategies to be compared::

163 I. Strategy SB90: 90% of the wet fermented solids were removed from the reactor at
164 the end of the fermentation (every 48h) and used as product for final analysis. The remaining
165 10% of the fermented solids acted as inoculum to start a new batch, using 90% fresh coffee
166 husk. Six sequential batches (12 days) were performed to allow the microbial community to
167 develop and to assess the reproducibility of the cellulases production.

168 II. Strategy SB50: 50% of the wet fermented solids were removed from the reactor
169 every 24h and used as product for further analysis. In this case, the remaining 50% of the
170 fermented solid was used as inoculum to start a new batch, with the addition of 50% of fresh
171 coffee husk. SB50 operated for 18 days.

172 Both strategies performed in parallel until steady operation resulting in 12 days for
173 SB90 and 18 days for SB50. Sampling was always performed after a complete manual
174 homogenization of the fermented solids to obtain a full representative sample and prior to
175 feeding the reactor with fresh substrate.

176

177 2.2.3 Oxygen Uptake Rate and Cumulative Oxygen Consumption

178 Specific oxygen uptake rate (sOUR) was calculated on-line for continuous monitoring
179 in order to provide more accurate information on biological activity (Garcia-Ochoa et al.,
180 2010), according to:

$$181 \quad sOUR = F \cdot (0.209 - y_{O_2}) \cdot \frac{P \cdot 32 \cdot 60 \cdot 10^3}{R \cdot T \cdot DW \cdot 10^3} \quad \text{Equation (1)}$$

182 where: sOUR is the specific Oxygen Uptake Rate (mg O₂ g⁻¹ DM h⁻¹); F, airflow (mL min⁻¹);
183 y_{O₂}, is the oxygen molar fraction in the exhaust gases (mol O₂ mol⁻¹); P, pressure of the
184 system assumed constant at 101325 Pa; 32, oxygen molecular weight (g O₂ mol O₂⁻¹); 60,
185 conversion factor from minute to hour; 10³, conversion factor from mL to L; R, ideal gas
186 constant (8310 Pa L K⁻¹ mol⁻¹); T, temperature at which F is measured (K); DW, initial dry
187 weight of solids in the reactor (g); 10³, conversion factor from g to mg. Moreover, the area
188 below the sOUR curve was also determined, which represents the cumulative oxygen
189 consumption (COC) during the process (Ponsá et al., 2010). These parameters will provide
190 information on the overall biological activity and one of the main energy requirements for
191 cellulases production.

192

193 2.3 Microbial characterization

194 Identification of the microbial population was performed in the raw materials and in
195 the final samples from both SB50 and SB90 operational strategies using next generation
196 sequencing. The aim of this analysis was to determine the potential variation on biodiversity
197 and to characterize the specialized biomass obtained during sequential batch operations.

198 Total DNA was extracted and purified using PowerSoil™ DNA Isolation Kit (MoBio
199 Laboratories, USA) according to provider's specifications. DNA samples were checked for

200 concentration and quality using the NanoDrop ND-1000 Spectrophotometer (NanoDrop
201 Technologies, Wilmington, Delaware; USA) (Lopez-Gonzalez et al., 2014).

202 Bacterial 16S rRNA hypervariable regions V3-V4 and Fungal ITS1-ITS3 were
203 targeted. Later sequencing of the extracted DNA and bioinformatics were performed on
204 MiSeq platform by Life Sequencing S.A (Valencia, Spain).

205 Shannon-Wiener (H') and qualitative (I_S) and quantitative (I_{Squant}) Sorensen's-Dice
206 biodiversity indices were estimated according to the following equations:

$$207 \quad H' = - \sum p_i \log_2 p_i$$

208 where $p_i = n_i/N$, n_i = relative abundance of the i^{th} species and $N = \sum n_i$, and

$$209 \quad I_S = \frac{2c}{a+b} ; \quad I_{Squant} = \frac{2pN}{aN+bN}$$

210 where a = number of species in sample 1, b = number of species in sample 2, c = number of
211 species shared by the two samples, pN = sum of the lower of the two abundances recorded for
212 species found in the two samples, aN = number of individuals in sample 1, bN = number of
213 individuals in sample.

214

215 2.4 Analytical methods

216

217 2.4.1 Enzyme extraction

218 Cellulases were extracted by adding 150 mL of citrate buffer (0.05 M, pH 4.8) to 10 g
219 of fermented solids in a 250 mL Erlenmeyer flask and mixing thoroughly on a magnetic
220 stirrer for 30 min at room temperature. The mixture was separated by centrifugation at 10000
221 rpm for 10 min, followed by filtration with a 0.45 μm filter. The remaining supernatant was
222 used for cellulases activity determination (Dhillon et al., 2012).

223

224 2.4.2 Enzymatic activity

225 The cellulase activity was measured according to the IUPAC filter paper assay
226 (Ghose, 1987). The reducing sugars were determined by the dinitrosalicylic (DNS)
227 colorimetric method (Miller, 1959). One filter paper unit (FPU) was expressed as equivalent
228 to the enzyme that releases 1 μ mol of reducing sugars under the assay conditions. The
229 cellulases production has been expressed with respect to the dry matter content, i.e, FPU g⁻¹
230 DM.

231

232 2.4.3 Routine methods

233

234 Moisture content, total and volatile solids, pH and electrical conductivity were
235 determined according to standard procedures (U.S Composting Council, 2001). Cellulose,
236 hemicellulose and lignin content were determined by the method of Van Soest et al., (1991)
237 using the Ankom200 Fiber Analyzer incubator (Ankom Technology, Macedon, NY), adding
238 amylase and sodium sulphite solutions.

239

240 2.5. Statistical Analysis

241 Statistical analysis was performed with basic ANOVA techniques while pairwise
242 comparisons were based on the Tukey test (at $p < 0.05$). Statistics were performed with
243 MINITAB™ V17.

244

245 3. Results and discussion

246

247 3.1 Preliminary experiments at lab scale

248 Figure 2a shows the profiles of the cellulase activity obtained when using different
249 inoculum sizes. Maximum cellulase activity was found in the first day of operation in all
250 cases. It can be noticed that the same trend is observed in all experiments; a rapid increase in
251 cellulase activity in day one followed by a gradual drop until the end of the fermentation.
252 The maximum cellulase activity was statistically similar for samples with 10 and 20% added
253 compost, reaching 7.0 ± 0.3 and 7.5 ± 0.5 FPU g^{-1} DM respectively. After day one, cellulase
254 production decreased achieving values around 0.18 FPU g^{-1} DM by the end of the
255 fermentation. Unexpectedly, adding 50% compost dramatically reduced cellulases production
256 until almost negligible values below values obtained with only CH or only C. A possible
257 explanation is that there was some diluting effect of the different types of biochemical
258 substrates and microbiota and the more complex composition of the mixture did not enhance
259 microbial activity.

260 In previous studies, the maximum enzymatic activity of amylases or proteases was not
261 related to the maximum biological activity measured as sOUR in similar systems (El-Bakry
262 et al., 2016, Cerda et al., 2016). However, for cellulases the opposite pattern was observed.
263 The maximum cellulase production was found on the peak of biological activity, i.e. during
264 maximum sOUR for all the assessed inoculum ratios (data not shown). As an example, Figure
265 2b shows a full sOUR profile for the sample using 10% of compost as inoculum. In this
266 Figure, it can be observed that the maximum cellulase activity was detected during the most
267 active biooxidative stage of the process, as other authors have also stated (Jurado et al.,
268 2014). Similar results were observed in batch experiments performed in 4.5L bioreactors
269 where a process time of 48h was fixed for maximum sOUR and cellulase production.

270

271 3.2 Sequential batch operation

272 The operation of bioreactors working under SB90 and SB50 conditions is presented in
273 Figures 3 and 4 respectively. In both cases, an initial 2-day fermentation process was
274 performed until the maximum sOUR was achieved adding compost in 10% ratio as a mixed
275 inoculum. Final average sOUR and cellulases activity in these initial fermentations for both
276 SB50 and SB90 strategies were $2.84 \pm 0.66 \text{ mgO}_2 \text{ g}^{-1}\text{DM h}^{-1}$ and $7.6 \pm 3.0 \text{ FPU g}^{-1}\text{DM}$
277 respectively. A similar temperature profile was obtained, with a maximum of 62°C in both
278 cases. The characterization of the initial and final fermented solids for both tested strategies is
279 presented in Table 1.

280 Six sequential batches were performed (12 days of operation) for the SB90 strategy as
281 presented in Figure 3. Operation was consistent and maximum sOUR and final cellulase
282 activity remained stable among the different batches, with an average sOUR of 2.6 ± 0.1
283 $\text{mgO}_2 \text{ g}^{-1}\text{DM h}^{-1}$ and $9.0 \pm 0.8 \text{ FPU g}^{-1}\text{DM}$. No statistical differences were observed for
284 cellulase activity among the six batches. The average COC was $87 \pm 6 \text{ mgO}_2 \text{ g}^{-1}\text{DM}$ per
285 batch (48h).

286 For SB50 strategy the fermentation was performed for a total process time of 18 days
287 (Figure 4). After the first substrate change the sOUR achieved at the end of the batch (24h)
288 was 68% lower although cellulase activity was statistically similar to that of the initial batch.
289 After two batches, maximum sOUR performed consistently to an average value of 3.4 ± 0.2
290 $\text{mgO}_2 \text{ g}^{-1}\text{DM h}^{-1}$ (alterations in days 11 and 15 correspond to failures in the aeration system
291 and the process quickly recovered from these). The average COC was $58 \pm 6 \text{ mgO}_2 \text{ g}^{-1}\text{DM}$
292 per batch (24h). Contrary to the sOUR dynamics, cellulase production was not consistent.
293 Cellulase activity of final extracts dropped gradually to $2.1 \pm 1.0 \text{ FPU g}^{-1}\text{DM}$ on day 10, to
294 increase after day 13 to final values of $10 \text{ FPU g}^{-1}\text{DM}$ on day 18, statistically similar to the
295 yields obtained with the SB90 strategy.

296 One of the main goals while developing these strategies was to achieve a steady cellulase
297 production and biological activity (sOUR). The SB90 system was able to reach a steady
298 maximum sOUR and cellulase production in only 12 days (6 sequential batches) while SB50
299 took 18 days. For SB50 it is likely that the sampling carried out in daily basis and the higher
300 amount of the substrate exchanged generated an impact on the biomass which could delay the
301 stabilization of the system.

302 Partial cellulose degradation of 3.1% and 3.2% was found for SB50 and SB90 in 24 and
303 48h respectively, which is in line with the values found in literature. Hemicellulose
304 degradation of nearly 2% was observed in both SB50 and SB90. Lignin degradation was
305 2.5% and 0.8% for SB50 and SB90. These results are comparable to those reported by
306 Umasaravanan et al. (2011) that observed only a 6% cellulose reduction and 3.1% lignin
307 reduction in 21 days using sugarcane bagasse and rice straw. Other authors reported high
308 cellulose degradation in SSF of lignocellulosic materials, for instance, 18% in 3 days using
309 olive wastes (Salgado et al., 2015) or 48% degradation in 23 days using high-cellulose paper
310 waste (Das et al., 1998). Whether the goal was to degrade and stabilize the lignocellulosic
311 material in such a process as composting then a longer process time would be required.
312 However in this case the main goal was to extract the maximum cellulase activity and thus
313 these percentages of degradation are acceptable.

314 Lack of standardized cellulase activity determination makes difficult to provide a proper
315 comparison with reported results. Even more, the most common substrate used for cellulase
316 activity, filter paper, generates great concerns on reproducibility and accuracy, especially in
317 mediums with low β -glucosidase production (Coward et al., 2003). However, cellulase
318 activity obtained in this work is located in the range of reported researches, between 1-25
319 FPU $g^{-1}DM$ for small bioreactors under sterile and mesophilic conditions (Behera et al.,
320 2016).

321 As it can be observed in Fig. 3 and 4, similar final cellulase yields were obtained for both
322 strategies. Also in both cases sOUR profile was displaced and the maximum was reached
323 sooner in comparison with the two first batches with compost. As previously discussed, the
324 maximum cellulase activity coincided with the maximum sOUR when using compost as
325 inoculum.

326 According to sOUR profiles, a reduction in lag phase was accomplished and global
327 biological activity was higher with the specialized biomass obtained at the end of the
328 sequential operation fermentation (final batches) compared to the first batch using compost as
329 inoculum. In general terms, a reduction of the lag phase and an increase in biological activity
330 were expected as a result of inoculation and specialization of biomass (Jurado et al., 2015).
331 This suggests growth stimulation of the microbial communities due to the inoculation of well
332 adapted microbiota. Moreover, it has been stated that inoculation of mixed inoculums not
333 only improved the process on its physical chemical parameters, but also stimulated
334 microbiota growth and microbial diversity during the process (Ishii et al., 2000, Liu et al.,
335 2011).

336 An enhancement of cellulases production was expected due to biomass specialization.
337 Cellulase production is regulated by an inhibition system, in which cellobiose and glucose
338 inhibits β -glucosidase (Kuhad et al., 2016). These readily metabolizable sugars released to
339 the medium are easily consumed by the microorganisms present in the fermentation, which is
340 one of the advantages of working with SSF. In this sense, it seems reasonable to assume that
341 cellulase production was affected by other circumstances, such as the release of inhibitory
342 compounds generated as the results of lignin degradation (Brijwani et al., 2011), non-
343 productive adsorption to lignin hydrolysates (Akimkulova et al., 2016) or even to depletion
344 of different mineral sources (Salgado et al., 2015).

345 A single research has been found on sequential batch in SSF for lipids and cellulases
346 production by oleaginous fungi (Cheirsilp et al., 2015), but this study was performed in a
347 different scale (<1g) and under sterile conditions. However, the authors found that at
348 different substrate exchange ratio (>50%), cellulases production could be sustained in values
349 ranging 1.81-2.25 FPU g⁻¹DM, although no increment on its activity was found, in
350 accordance with the findings described in this work.

351

352 3.3 Microbial characterization

353

354 3.3.1 Bacteria

355 A total of 22 bacterial families were detected in SB50 and SB90 with an abundance above
356 1% as presented in Figure 5. Only those families present in C and CH that were also found in
357 SB50 and SB90 final products are depicted for C and CH in order to better illustrate the
358 origin of the bacterial community present in the final products. Other families that did not
359 thrive along the fermentations have been ignored for clarity purposes. The complete
360 characterization of C and CH is presented in Table S1. SB50 and SB90 presented a uniform
361 distribution, with roughly 15 and 20% of less than 1% of relative abundance, and a relative
362 high biodiversity as indicated by Shannon-Wiener index, which reached levels greater than 3
363 for this taxonomic level (3.43 and 3.07, respectively). Taking into account the values found
364 for both raw materials (3.75 for C and 1.73 for CH), bacterial communities in two final
365 products seem to be more influenced by compost, despite its lower percentage at the initial
366 mixture. Sorensen's-Dice indices, qualitative and quantitative (Figure 6), strengthen this
367 assessment, since higher values and, consequently, greater similarities were obtained when
368 comparisons were established between either both final products and C. According to these
369 results and those obtained from preliminary assay at lab scale (Section 3.1), CH would be a

370 proper and more efficient substrate to promote cellulase activity on account of its high
371 cellulose content, but the bacterial cellulolytic community in compost dominates the structure
372 of the final products. Compost is the result of a complex process characterized by the
373 presence of recalcitrant and non-readily degradable substrates. From a biological point of
374 view, this results in a very strong competitive selection of the microorganisms able to carry
375 out all the necessary transformations. Thus, a concentration effect takes place throughout the
376 process (Lopez-Gonzalez et al., 2014) that promotes the presence of a more specialized
377 microbiota in the final product, adapted to those specific nutritional conditions that are typical
378 in composting, among them, cellulolytic microorganisms.

379 The lower similarity between the bacterial population associated to CH and both final
380 products is clearly evidenced by the fact that the most abundant families in CH,
381 *Pseudomonadaceae* (33.7%), *Leuconostocaceae* (22.6%), *Enterobacteriaceae* (17.7%) and
382 *Enterococcaceae* (16.3%) (Table S1), were sparingly represented in the latter. Thus, only the
383 latest was found with a relative presence over 1% in SB50. On the other hand, in C nearly
384 80% of all families were a part of *Firmicutes*, *Proteobacteria* and *Actinobacteria* phyla,
385 which have been found to be predominant in compost from lignocellulosic materials (Zhang
386 et al., 2016). *Clostridiaceae* was the most predominant family in C present in 7.7%, which
387 was present in both SB50 and SB90. It is important to point out that *Pseudomonaceae* and
388 *Rhodospirillaceae* families were more abundant in the CH and C respectively, however their
389 species were not able to thrive at the fermentations conditions of SB50 and SB90. Amounts
390 of these families on final fermentation products were below 1%.

391 SB50 and SB90 resulted in similar bacterial distribution, in which compost influence as
392 inoculum is clearly reflected. *Sphingobacteriaceae*, *Paenibacillaceae* and
393 *Xanthomonadaceae* families together were present in a discrete 2.2% in C, however, they
394 represented a 47.2 and 33.1% in SB50 and SB90 respectively. From these families, several

395 species have been identified during the early stage of lignocellulosic material composting
396 process (Lopez-Gonzalez et al., 2015a).

397 From the dominant families, *Pseudoxanthomonas taiwanensis* and *Sphingobacterium*
398 *composti* appeared as most abundant identified species in SB50 and SB90. Relative
399 abundances of these species were 12.3 and 6.1% for SB50 and 6.1 and 2.6% for SB90
400 respectively. *P. taiwanensis* has been widely related to cellulose degradation systems, for its
401 β -glucosidase production and the potential enhancement of the growth of other cellulolytic
402 bacterias (Eichorst et al., 2013). On the other hand, *S. composti* has been related to lignin
403 degradation and the production of acids in aerobic conditions (Karadag et al., 2013). The
404 presence of these two species confirmed the results obtained in both sequential batch
405 operations, which presented significant lignin and cellulose degradation. Furthermore, from
406 *Paenibacillaceae* family *Paenibacillus* and *Thermobacillus* genera were the most abundant.
407 Several species from both genera have been widely reported as strong cellulose degraders
408 such as *P.chitinolyticus* (Mihajlovski et al., 2015), which was found on SB50 and SB90 in
409 near 2% of relative abundance. Also *T.composti* has been found in 4 and 2.5% in SB50 and
410 SB90 respectively. This specie is associated with cellobiase and xylanolytic activity during
411 thermophilic stage in composting processes (de Gannes et al., 2013). Lately it has been
412 characterized as halotolerant, which is of great interest for its bioethanol potential using ionic
413 liquids (Watanabe et al., 2007).

414

415 3.3.2 Fungi and yeasts

416 A total of 12 families were detected for C, CH, SB50 and SB90 as presented in Figure
417 7. First of all, it is possible to notice that in all samples there is a great amount of non-
418 identified DNA, described only as Eukariota, representing 25.7, 5.5, 44.8 and 5.8% of
419 mycobiota from C, CH, SB50 and SB90 respectively. This relatively high rate of unidentified

420 fungi may be consequence of the still scarce and sometimes confusing information available
421 on data base concerning molecular characterization of fungi, especially in comparison with
422 bacteria, which now limits the potential for elucidating the structure of the mycobiota
423 associated to different environments (Langarica-Fuentes et al., 2014).

424 Remarkably, most of the fungi and yeasts in SB50 and SB90 come from CH where
425 four families account for 94.4% of all mycobiota. This similarity was particularly notable for
426 SB50, with remarkable differences as expressed by the values of the Sorensen's-Dice index
427 associated to both comparisons, SB50 v. C and SB50 v. CH (Figure 6). Fungal biodiversity
428 increased in the final materials compared to CH as the Shannon indices obtained were 1.63,
429 0.98, 1.39 and 1.33 for C, CH, SB50 and SB90. Predominant families were
430 *Phaffomycetaceae*, *Dipodascaceae*, and two unidentified families of the class of
431 *Tramellomycetes*. Distribution in SB50 and SB90 was similar in content but not in
432 proportion, resulting in higher qualitative homology in contrast to quantitative.
433 *Phaffomycetaceae* family was present in CH in 7.8% and in negligible amounts in C. This
434 family thrived on both reactors, achieving a relative abundance of 21.9 and 43.2% in SB50
435 and SB90 respectively. In this family two yeasts species were identified. The more abundant
436 specie was identified as *Cyberlindnera jardinii*, (17.8 and 34.0% in SB50 and SB90
437 respectively), which is able to metabolize pentoses and tolerates lignin by-products, which
438 makes it a suitable specie for the treatment of lignocellulosic wastes (Nordberg et al., 2014,
439 Lopez-Gonzalez et al., 2015b). The second specie was *Barnettozyma californica* (4.1 and
440 9.1% in SB50 and SB90 respectively), a xylose-fermenting and xylanase producer yeast
441 (Morais et al., 2013). In this sense, in SB90, most of fungal/yeast population is focused on
442 hemicellulases metabolism which, in a way, could increase cellulose availability by relaxing
443 the rigid lignocellulosic matrix, which would result in an easier accessibility to this
444 macropolymer, and an increase in the cellulases production. Another difference between both

445 final fermented solids is the high abundance of *Dipodascaceae* family only in SB50, with a
446 21.9%. in comparison with 0.15% of SB90. *Dipodascus australiensis* and *Galactomyces* sp.
447 are the most representative yeasts of this family and has been proven to be xylanase producer
448 and the latter, cellulose degrader with mild halotolerant characteristics (He et al., 2016).
449 Finally in *Tremellomycetes* class, *Tremellales* order, 3 different genera were detected as
450 *Trichosporonales* sp. LM659, uncultured *Tremellales* and uncultured *Trichosporon* which all
451 together account as 85.5, 10.3 and 46.5% of CH, SB50 and SB90 respectively. No species
452 were identified in this order, however some reports on different species of this order has been
453 proven to be unconventional due to absence of diauxic effect, i.e fermenting hexoses and
454 pentoses while also effectively utilizes xylose and *N*-acetylglucosamine, which are building
455 blocks of lignocellulosic materials (Kourist et al., 2015).

456

457 3.3.3. Overall performance of the process and the microbial communities involved

458 In general, solids obtained at the end of SB50 and SB90 fermentations, provided a
459 strongly specialized mixed inoculum for lignocellulosic materials degradation. A slightly
460 higher microbial diversity (expressed as the Shannon index) in SB50 compared to SB90
461 probably means a lower specialization degree of the biomass. This biomass could be
462 associated to the degradation of other components of the material, such as proteins or
463 hemicellulose as in the case of yeasts characterization as explained above. Cellulose
464 degrading activity was mainly provided by bacterial populations; however it is important to
465 remark that cellulolytic bacteria do not always express the full cellulose degradation system
466 (Behera et al., 2016). On the other hand, hemicellulose degradation potential was provided by
467 fungal/yeasts species. In spite of the abundance of hemicellulose degraders, hemicellulose
468 degradation was negligible (Table 1). It is possible that this biomass was not active during the
469 process, or the activity was low in comparison with cellulose or even lignin degraders, or that

470 the hemicellulolytic microorganisms act partially on the heteropolymer, promoting relaxation
471 but not degradation in an extensive rate.

472 Considering these results it is likely that synergistic or complementary actions take
473 place in the total microbiota of the reactors. Degradation of cellulose does not occur in
474 isolation conditions. As a constituent of the lignocellulosic matrix, the action of cellulases is
475 not the only requirement for the transformation of this glucose polymer (Kanokratana et al.,
476 2015). Thus, the biodegradation process is the result of different cooperative actions that first
477 promote the relaxation of the enmeshed structure that characterize lignocellulose. This initial
478 phase-stage allows the access of enzymes to the site of action and, consequently, is one of the
479 key steps in order to achieve the depolymerisation, not just of cellulose but of all
480 macropolymers in lignocellulose too (Duarte et al., 2012). From a microbial point of view,
481 the complexity of the process acts as a pressure factor that promotes the selection for a
482 microbiota metabolically adapted to the nutritional demands associated to lignocellulosic
483 environments. This is true for artificial hábitats in particular, such as the case described in
484 this work, in which microbiota shifts from a metabolically diverse community to a
485 specialized one (López-González et al., 2014). In this sense, it would be highly improbable
486 that lignocellulosic and lignocellulosic-inhibiting populations coexisted during such a
487 selective process. Nevertheless, it cannot be excluded some other inhibitory effects associated
488 to the products resulting from the action of cellulases and other lignocellulosic enzymes, as
489 glucose, cellobiose or phenolic compounds, although microorganisms that consume these
490 inhibitory compounds use to be members of the lignocellulosic community (Wongwilaiwalin
491 et al., 2013).

492 In light of the experimental data presented in this work, it is possible to remark that the use
493 of fermented solids as inoculum in a sequential batch operation is very successful. The
494 proposed operation offers a way to reduce costs in inoculum requirements and potentially to

495 the reduction of solid wastes generation as suggested by Farinas (2015). The studies on
496 microbial diversity on non-sterile SSF processes are scarce. In this process a specialized
497 biomass provides the generation of an enzymatic pool, containing different enzymatic
498 activities related to lignocellulose degradation. The positive effects of using a multi-
499 enzymatic preparation have been reported by Melikoglu et al., (2013). These authors were
500 able to improve bioethanol production by producing several enzymes by SSF. Furthermore, it
501 has been proven that the use of these enzymatic pools without any additional processing steps
502 provides better results than commercial preparations, reducing operational costs (Lever et al.,
503 2005). In summary, the proposed process presents the following economic advantages: the
504 use of organic wastes instead of pure substrates; saving the investment and the operating
505 costs related to sterilization; saving the costs of producing inoculum for each batch, since
506 fermented solids from one batch are re-used to inoculate the following batch; the potential
507 use of the multienzymatic extracts without additional purification steps. Further economic
508 assessment should confirm the cost effectiveness of the process.

509

510 4. Conclusion

511 Operation of SSF of coffee husk in sequential batches has been proven as a suitable
512 strategy for cellulases production using a mixed inoculum. SB50 and SB90 strategies
513 provided a sustained fermentation for 18 and 12 days respectively and cellulase production
514 stabilised at around 10 FPU g⁻¹DM. 48h batches in the strategy SB90 provided a more
515 consistent operation while SB50 required more time to reach a pseudo-steady state. Both
516 strategies obtained cellulase activity in the reported range of production. The sequential
517 process allowed the enrichment of cellulose and hemicellulose degraders, eliminating the
518 requirements of fresh inoculum for each batch. Bacterial communities obtained at the end of
519 both processes came from compost with great cellulose degradation potential. Fungal and

520 yeasts communities came mostly from coffee husk, with high hemicellulose degradation
521 potential. The development of these operational strategies and further biological
522 characterization of the end product could eventually benefit the process economics by
523 providing a standard and specialized inoculum for a continuous solid state fermentation for
524 cellulases production. Further research will focus on the improvement of cellulase
525 production, the process scale-up and the optimization of cellulase extraction by comparing
526 different downstream processing strategies.

527

528 **Acknowledgments**

529 This research has been funded by the Spanish “Ministerio de Economía y Competitividad”
530 (project CTM2015-69513-R). Alejandra Cerda wants to thank to Universitat Autònoma de
531 Barcelona for her pre-doctoral grant. The authors thank to Marcilla, Pere Aubach and Manuel
532 Córdoba for providing coffee husk.

533 **References**

- 534 Abraham, J., Gea, T., Sánchez, A. 2013. Potential of the solid-state fermentation of
535 soy fibre residues by native microbial populations for bench-scale alkaline protease
536 production. *Biochem Eng J.* 74,15-9.
- 537 Akimkulova, A., Zhou, Y., Zhao, X., Liu, D. 2016. Improving the enzymatic
538 hydrolysis of dilute acid pretreated wheat straw by metal ion blocking of non-productive
539 cellulase adsorption on lignin. *Bioresour Technol.* 208, 110-6.
- 540 Arora, R., Behera, S., Kumar, S. 2015. Bioprospecting thermophilic/thermotolerant
541 microbes for production of lignocellulosic ethanol: A future perspective. *Renew. Sustainable
542 Energy Rev.* 51,699-717.
- 543 Astolfi, V., Joris, J., Verlindo, R., Oliveira, J., Maugeri, F., Mazutti, M., De Olivera,
544 D., Treichel, H. 2011. Operation of a fixed-bed bioreactor in batch and fed-batch modes for
545 production of inulinase by solid-state fermentation. *Biochem Eng J.* 58, 39-49.
- 546 Behera, S., Ray, R. 2016. Solid state fermentation for production of microbial
547 cellulases: Recent advances and improvement strategies. *Int J Biol Macromol.* 86, 656-69.
- 548 Brijwani, K., Vadlani, P. 2011. Cellulolytic enzymes production via solid-state
549 fermentation: Effect of pretreatment methods on physicochemical characteristics of substrate.
550 *Enzyme Res.* 2011, 860134.
- 551 Cerda, A., El-Bakry, M., Gea, T., Sánchez, A. 2016. Long term enhanced solid-state
552 fermentation: Inoculation strategies for amylase production from soy and bread wastes by
553 *Thermomyces* sp. in a sequential batch operation. *J Env Chem Eng.* 4,2394-2401.

554 Cheirsilp, B., Kitcha, S. 2015. Solid state fermentation by cellulolytic oleaginous
555 fungi for direct conversion of lignocellulosic biomass into lipids: Fed-batch and repeated-
556 batch fermentations. *Ind Crop Prod.* 66,73-80.

557 Coward-Kelly, G., Aiello-Mazzari, C., Kim, S., Granda, C., Holtzapple, M. 2003.
558 Suggested improvements to the standard filter paper assay used to measure cellulase activity.
559 *Biotechnol Bioeng.* 82:745-9.

560 Das, K., Tollner, E., Tornabene, T. 1998. Composting pulp and paper industry solid
561 wastes: process design and product evaluation. *Proceedings of the composting in the*
562 *southeast-conference and expo Athens, GA.* p. 9-11.

563 de Gannes, V., Eudoxie, G., Hickey, W. 2013. Prokaryotic successions and diversity
564 in composts as revealed by 454-pyrosequencing. *Bioresour Technol.* 133, 573-80.

565 Dhillon, G., Kaur, S., Brar, S., Verma, M. 2012. Potential of apple pomace as a solid
566 substrate for fungal cellulase and hemicellulase bioproduction through solid-state
567 fermentation. *Ind Crop Prod.* 38, 6-13.

568 Duarte, G.C, Moreira, L.R.S., Jaramillo, P.M.D., Filho, E.X.F. 2012. Biomass-derived
569 inhibitors of holocellulases. *Bioenerg Res.* 5, 768-777.

570 Eichorst, S., Varanasi, P., Stavila, V., Zemla, M., Auer, M., Singh, S. 2013.
571 Community dynamics of cellulose-adapted thermophilic bacterial consortia. *Environ*
572 *Microbiol.* 15, 2573-87.

573 El-Bakry, M., Abraham, J., Cerda, A., Barrena, R., Ponsá, S., Gea, T., Sánchez, A.
574 2015. From Wastes to High Value Added Products: Novel Aspects of SSF in the Production
575 of Enzymes. *Crit Rev Env Sci Tech.* 45,1999-2042.

576 El-Bakry, M., Gea, T., Sánchez, A. 2016. Inoculation effect of thermophilic
577 microorganisms on protease production through solid-state fermentation under non-sterile
578 conditions at lab and bench scale (SSF). *Bioprocess Biosyst Eng.* 39, 585-92.

579 Farinas C. 2015. Developments in solid-state fermentation for the production of
580 biomass degrading enzymes for the bioenergy sector. *Renew Sustainable Energy Rev.* 52,
581 179–188.

582 Garcia-Ochoa, F., Gomez, E., Santos, V., Merchuk, J. 2010. Oxygen uptake rate in
583 microbial processes: An overview. *Biochem. Eng. J.* 49, 289-307.

584 Ghose T. 1987. Measurement of cellulase activities. *Pure Appl Chem.* 59, 257-268.

585 He, Y., Liu, F., Gong, L., Di, J., Ding, Y., Ma, C. 2016. Enzymatic in situ
586 saccharification of chestnut shell with high ionic liquid-tolerant cellulases from
587 *Galactomyces* sp. CCZU11-1 in a biocompatible ionic liquid-cellulase media. *Bioresour*
588 *Technol.* 201,133-139.

589 Heather, L., Sabrina, S. 2009. The contribution of enzymes and process chemicals to
590 the life cycle of ethanol. *Environ Res Lett.* 4, 14001.

591 Ishii, K., Fukui, M., Takii, S. 2000. Microbial succession during a composting process
592 as evaluated by denaturing gradient gel electrophoresis analysis. *J Appl Microbiol.* 89, 768-
593 77.

594 Jurado, M., Suárez-Estrella, F., Vargas-García, M., López, M., López-González, J.,
595 Moreno, J. 2014. Evolution of enzymatic activities and carbon fractions throughout
596 composting of plant waste. *J Environ Manage.* 133, 355-364.

597 Jurado, M., Suárez-Estrella, F., López, M., Vargas-García, M., López-González, J.,
598 Moreno, J. 2015. Enhanced turnover of organic matter fractions by microbial stimulation
599 during lignocellulosic waste composting. *Bioresour Technol.* 186, 15-24.

600 Kanokratana, P., Eurwilaichitr, L., Pootanakit, K., Champreda, V 2015. Identification
601 of glycosyl hydrolases from a metagenomic library of microflora in sugarcane bagasse
602 collection site and their cooperative action on cellulose degradation. *J Biosc. Bioeng.* 4, 384-
603 391.

604 Karadag, D., Özkaya, B., Ölmez, E., Nissilä, M., Çakmakç, M., Yıldız, Ş., Puhakka, J.
605 2013. Profiling of bacterial community in a full-scale aerobic composting plant. *Int Biodeter*
606 *Biodegr.* 77, 85-90.

607 Kourist, R., Bracharz, F., Lorenzen, J., Kracht, O., Chovatia, M., Daum, C. 2015.
608 Genomics and transcriptomics analyses of the oil-accumulating basidiomycete yeast
609 *Trichosporon oleaginosus*: Insights into substrate utilization and alternative evolutionary
610 trajectories of fungal mating systems. *mBio.* 6, 00918-15.

611 Kuhad, R., Deswal, D., Sharma, S., Bhattacharya, A., Jain, K., Kaur, A. 2016.
612 Revisiting cellulase production and redefining current strategies based on major challenges.
613 *Renew. Sustainable Energy Rev.* 55, 249-72.

614 Langarica-Fuentes, A., Zafar, U., Heyworth, A., Brown, T., Fox, G., Robson, G.
615 2014. Fungal succession in an in-vessel composting system characterized of using 454
616 pyrosequencing. *FEMS Microbiol Ecol.* 88, 296-308.

617 Lever M. 2005. Modelling the energy performance of a farm-scale cellulose to ethanol
618 process with on-site cellulase production and anaerobic digestion. *Renew. Energy.* 74,893-
619 902.

620 Lever, M., Ho, G., Cord-Ruwisch, R. 2010. Ethanol from lignocellulose using crude
621 unprocessed cellulase from solid-state fermentation. *Bioresour Technol.* 101, 7083–7087

622 Liu, J., Xu, X., Li, H., Xu, Y. 2011. Effect of microbiological inocula on chemical and
623 physical properties and microbial community of cow manure compost. *Biomass Bioenergy.*
624 35, 3433-9.

625 López-González, J., Vargas-García, M., López, M., Suárez-Estrella, F., Jurado, M.,
626 Moreno, J. 2014. Enzymatic characterization of microbial isolates from lignocellulose waste
627 composting: Chronological evolution. *J Environ Manage.* 145, 137-46.

628 López-González, J., Suárez-Estrella, F., Vargas-García, M., Lopez, M., Jurado, M.,
629 Moreno, J. 2015a. Dynamics of bacterial microbiota during lignocellulosic waste
630 composting: Studies upon its structure, functionality and biodiversity. *Bioresour Technol.*
631 175, 406-416.

632 López-González, J., Vargas-García, M., López, M., Jurado, M., Moreno, J. 2015b.
633 Biodiversity and succession of mycobiota associated to agricultural lignocellulosic waste-
634 based composting. *Bioresour Technol.* 187, 305-313

635 McMillan, J., Jennings, E., Mohagheghi, A., Zuccarello, M. 2011. Comparative
636 performance of precommercial cellulases hydrolyzing pretreated corn stover. *Biotechnol*
637 *Biofuels.* 4,1-17.

638 Melikoglu, M., Sze, C., Webb, C. 2013. Kinetic studies on the multi-enzyme solution
639 produced via solid state fermentation of waste bread by *Aspergillus awamori*. *Biochem Eng*
640 *J.* 80, 76–82.

641 Mihajlovski, K., Carević, M., Dević, M., Šiler-Marinković, S., Rajilić-Stojanović, M.,
642 Dimitrijević-Branković, S. 2015. Lignocellulosic waste material as substrate for Avicelase
643 production by a new strain of *Paenibacillus chitinolyticus* CKS1. *Int Biodeter Biodegr.*
644 104,426-34.

645 Miller G. 1959. Use of dinitrosalicylic acid reagent for determination of reducing
646 sugar. *Anal Chem.* 31,426-8.

647 Mitchell, D., Berovič, M., Krieger, N. 2006. Solid-State Fermentation Bioreactor
648 Fundamentals: Introduction and Overview. In: Mitchell, D., Berovič, M., Krieger, N., editors.
649 Solid-State Fermentation Bioreactors: Fundamentals of Design and Operation. Berlin,
650 Heidelberg: Springer Berlin Heidelberg; p. 1-12.

651 Morais, C., Cadete, R, Uetanabaro, A., Rosa, L., Lachance, M., Rosa, C. 2013. D-
652 xylose-fermenting and xylanase-producing yeast species from rotting wood of two Atlantic
653 Rainforest habitats in Brazil. *Fungal Genet Biol.* 60, 19-28.

654 Murthy, P.S., Naidu, M.M. 2012. Sustainable management of coffee industry by-
655 products and value addition—A review. *Resour. Conserv. Recycl.* 66, 45–58.

656 Mussatto, S. I., Machado, E. M. S., Martins, S., Teixeira, J. A. 2011. Production,
657 composition, and application of coffee and its industrial residues. *Food Bioprocess Tech.* 4,
658 661–672.

659 Narita, Y., Inouye, K. 2014. Review on utilization and composition of coffee
660 silverskin. *Food Res In.* 61, 16-22.

661 Nordberg, H., Cantor, M., Dusheyko, S., Hua, S., Poliakov, A., Shabalov, I. 2014. The
662 genome portal of the Department of Energy Joint Genome Institute: 2014 updates. *Nucleic*
663 *Acids Res.* 42:D26-D31.

664 Pensupa, N., Jin, M., Kokolski, M., Archer, D. Du, C. 2013. A solid state fungal
665 fermentation-based strategy for the hydrolysis of wheat straw. *Bioresour. Technol.*149, 261-
666 267

667 Pessoa, D., Finkler, A., Machado, A., Luz, L., Mitchell D. 2016. Fluid dynamics
668 simulation of a pilot-scale solid-state fermentation bioreactor. *Chem Eng Trans.* 49: 49-54.

669 Olofsson, K., Bertilsson, M., Lidén, G. 2008. A short review on SSF – an interesting
670 process option for ethanol production from lignocellulosic feedstocks. *Biotechnol Biofuels.* 1,
671 1-14.

672 Ponsá, S., Gea, T., Sánchez, A. 2010. Different Indices to Express Biodegradability in
673 Organic Solid Wastes. *J Environ Qual.*39, 706-12.

674 Ruggieri, L., Gea, T., Artola, A., Sánchez, A. 2009. Air filled porosity measurements
675 by air pycnometry in the composting process: a review and a correlation analysis. *Bioresour.*
676 *Technol.* 100, 2655–2666.

677 Salgado, J., Abrunhosa, L., Venâncio, A., Domínguez, J., Belo, I. 2015. Enhancing
678 the bioconversion of winery and olive mill waste mixtures into lignocellulolytic enzymes and
679 animal feed by *Aspergillus uvarum* using a packed-bed bioreactor. *J Agric Food Chem.* 63,
680 9306-14.

681 Shemekite, F., Gómez-Brandón, M., Franke-Whittle, I.H., Praehauser, B., Insam, H.,
682 Assefa, F. 2014. Coffee husk composting: An investigation of the process using molecular
683 and non-molecular tools. *Waste Manage.* 34, 642-652.

684 Tolan, J., Foody, B. 1999. Cellulase from submerged fermentation. In: Tsao GT,
685 Brainard AP, Bungay HR, Cao NJ, Cen P, Chen Z, editors. *Recent Progress in Bioconversion*
686 *of Lignocellulosics.* Berlin, Heidelberg: Springer Berlin Heidelberg; p. 41-67.

687 Umasaravanan, D., Jayapriya, J., Rajendran, R. 2011. Comparison of lignocellulose
688 biodegradation in solid state fermentation of sugarcane bagasse and rice straw by *Aspergillus*
689 *tamarii*. *Cey J Sci Biol Sci.* 40 (1), 65-68.

690 US Composting Council. 2001. Test methods for the examination of composting and
691 compost. Houston: Edaphos International.

692 Van Soest, P., Robertson, J., Lewis, B. 1991. Methods for dietary fiber, neutral
693 detergent fiber, and non starch polysaccharides in relation to animal nutrition. *J Dairy Sci.*
694 74(10), 3583-3597.

695 Watanabe, K., Nagao, N., Yamamoto, S., Toda, T., Kurosawa, N. 2007.
696 *Thermobacillus composti* sp. nov., a moderately thermophilic bacterium isolated from a
697 composting reactor. *Int J Syst Evol Microbiol.* 57, 1473-7.

698 Wongwilaiwalin, S., Laothanachareon, T., Mhuantong, W., Tangphatsornruang, S.,
699 Eurwilaichitr, L., Igarashi, Y. 2013. Comparative metagenomic analysis of microcosm
700 structures and lignocellulolytic enzyme systems of symbiotic biomass-degrading consortia.
701 *Appl Microbiol Biotechnol.* 97, 8941–8954.

702 Zhang, L., Zhang, H., Wang, Z., Chen, G., Wang, L. 2016. Dynamic changes of the
703 dominant functioning microbial community in the compost of a 90-m³ aerobic solid state
704 fermentor revealed by integrated meta-omics. *Bioresour Technol.* 203, 1-10.

Tables

Table 1. Characterization of coffee husk (CH), compost (C), initial mixtures and final fermented solids for SB50 and SB90.

Parameter	Coffee Husk	Compost	SB50 initial	SB90 initial	SB50 final	SB90 final
Moisture % (wb)	60.8 ± 0.4	34.9 ± 0.3	61.2 ± 1.1	62.0 ± 1.3	55.0 ± 1.1	55.0 ± 3.1
Organic matter (% db)	90.2 ± 0.1	82.5 ± 0.1	nd	nd	nd	nd
pH	6.51 ± 0.01	7.22 ± 0.01	6.45 ± 0.01	6.43 ± 0.01	9.11 ± 0.01	9.07 ± 0.01
Cellulose (% db)	25.7 ± 0.2	9.8 ± 1.2	23.4 ± 0.8	27.9 ± 0.4	28.6 ± 0.5	23.5 ± 0.4
Hemicellulose (% db)	14.6 ± 0.1	10.2 ± 0.1	13.2 ± 0.5	13.3 ± 0.3	13.2 ± 0.5	13.3 ± 0.5
Lignin (% db)	17.6 ± 0.5	13.6 ± 1.2	20.4 ± 0.6	21.8 ± 0.6	16.5 ± 0.7	18.3 ± 0.6

wb: wet basis; db: dry basis; nd: not determined.

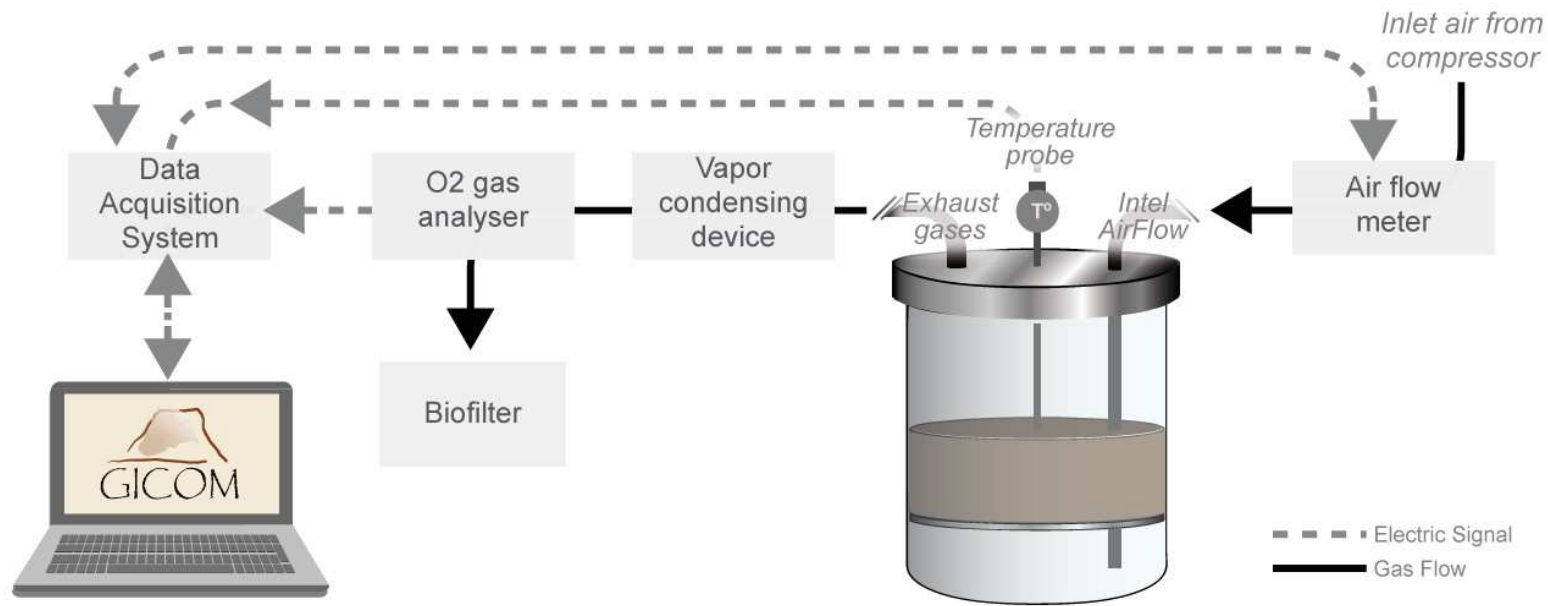


Figure 1. Experimental set-up of the solid-state fermentation system.

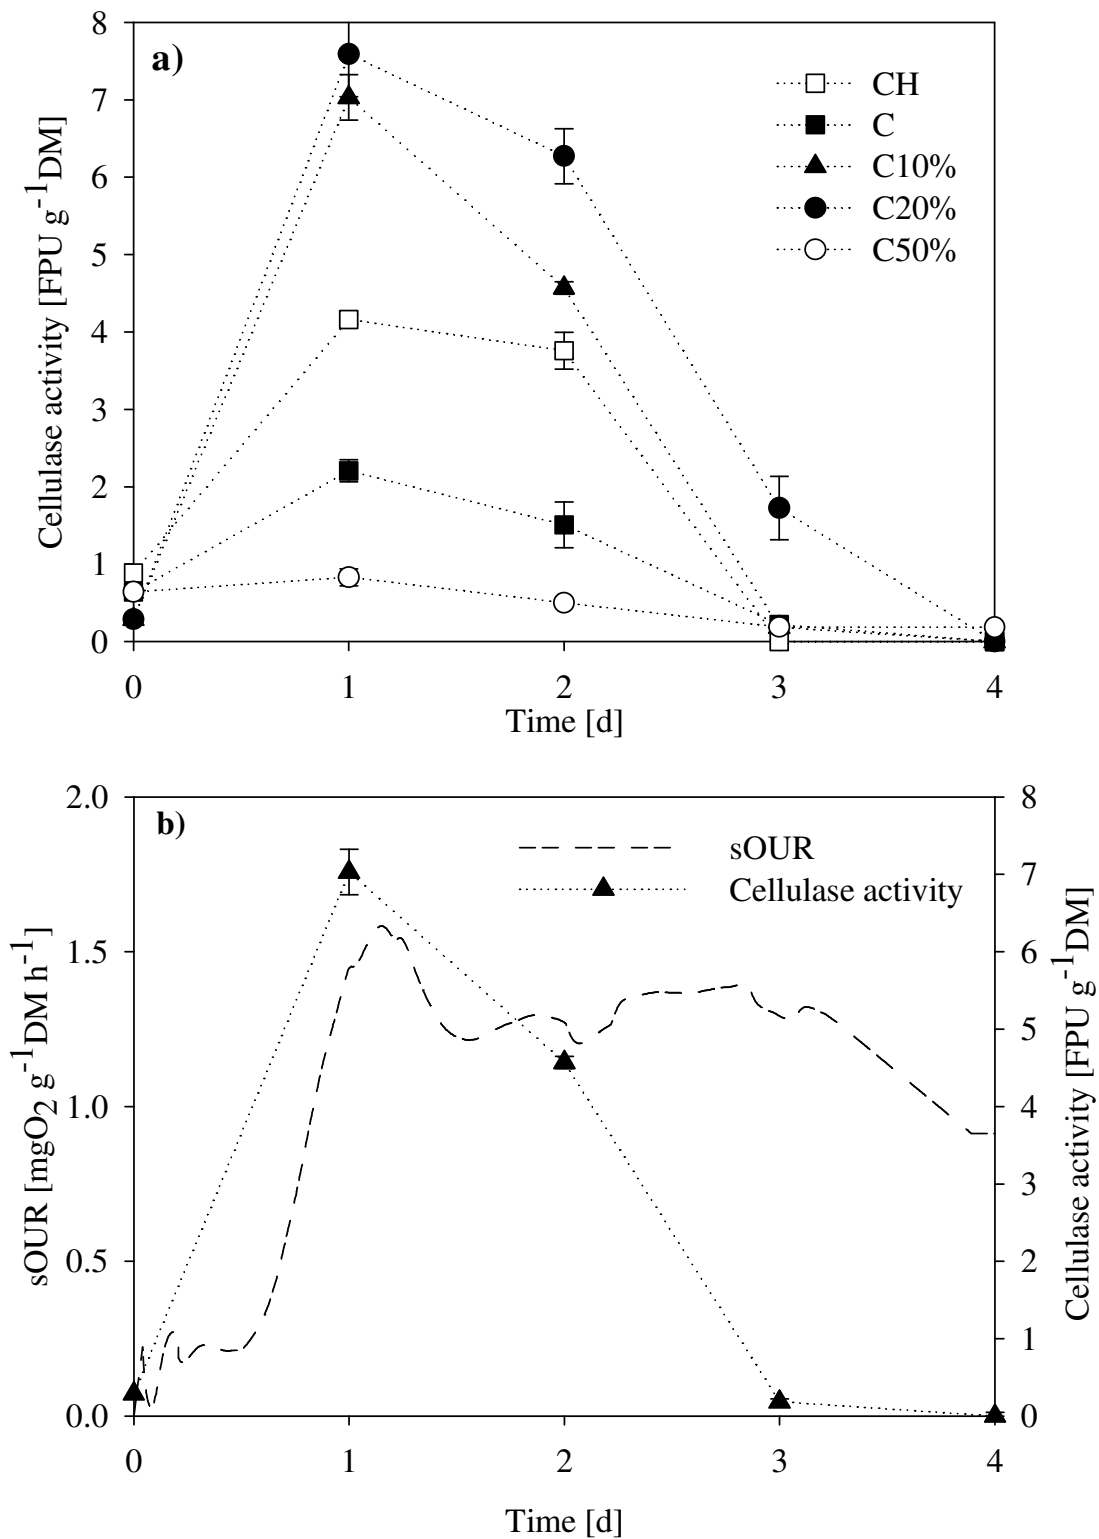


Figure 2. SSF of coffee husk using compost as inoculum at lab scale and 37°C during 4 days. a) Profile of cellulase production using different inoculum sizes and b) profiles of sOUR and cellulase production using 10% of inoculum (CH: coffee husk; C:compost).

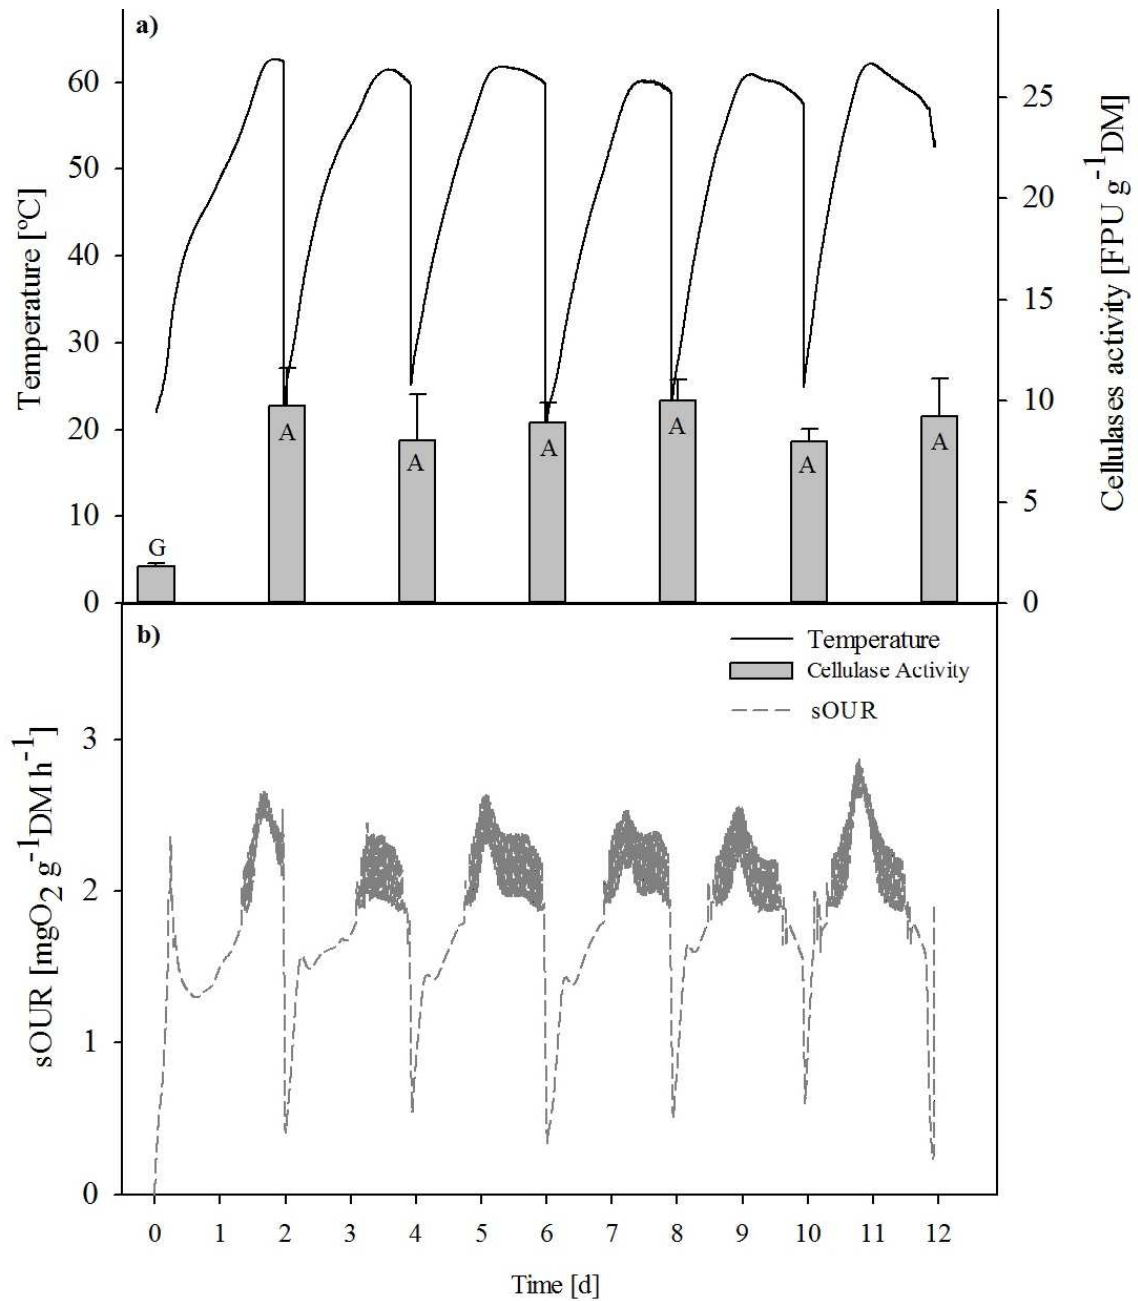


Figure 3. Process follow up of sequential batch operation SB90 of coffee husk for cellulase production. In a) temperature and cellulase activity and b) sOUR profiles are presented. Bars that do not share a letter are significantly different.


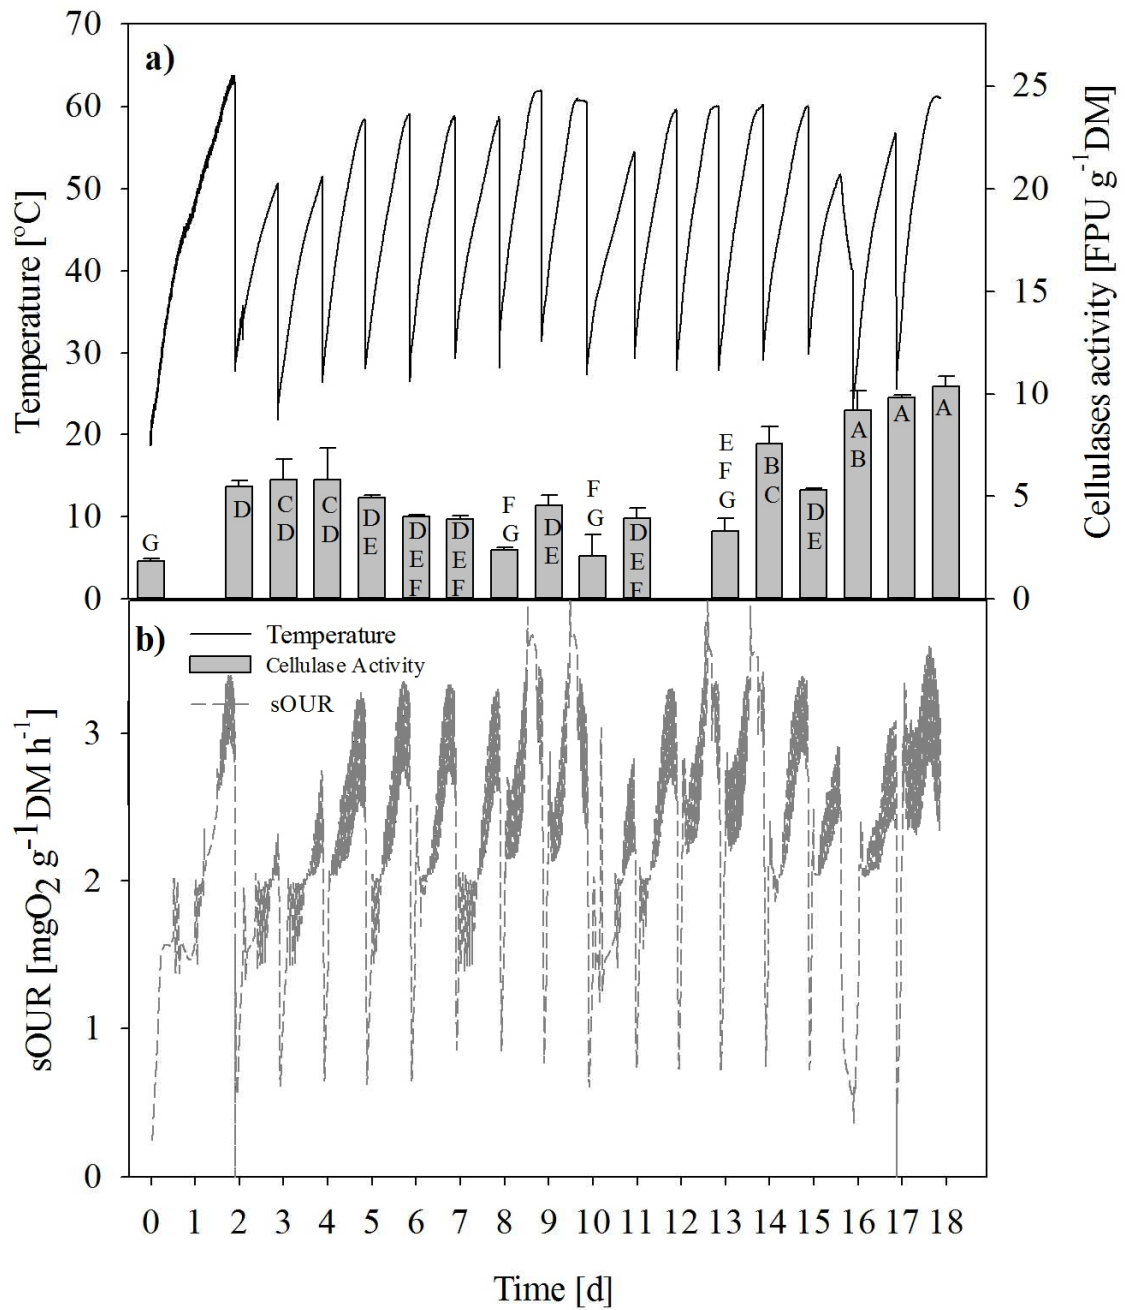


Figure 4. Process follow up of sequential batch operation SB50 of coffee husk for cellulase production. In a) temperature and cellulase activity and b) sOUR profiles are presented. Bars that do not share a letter are significantly different.

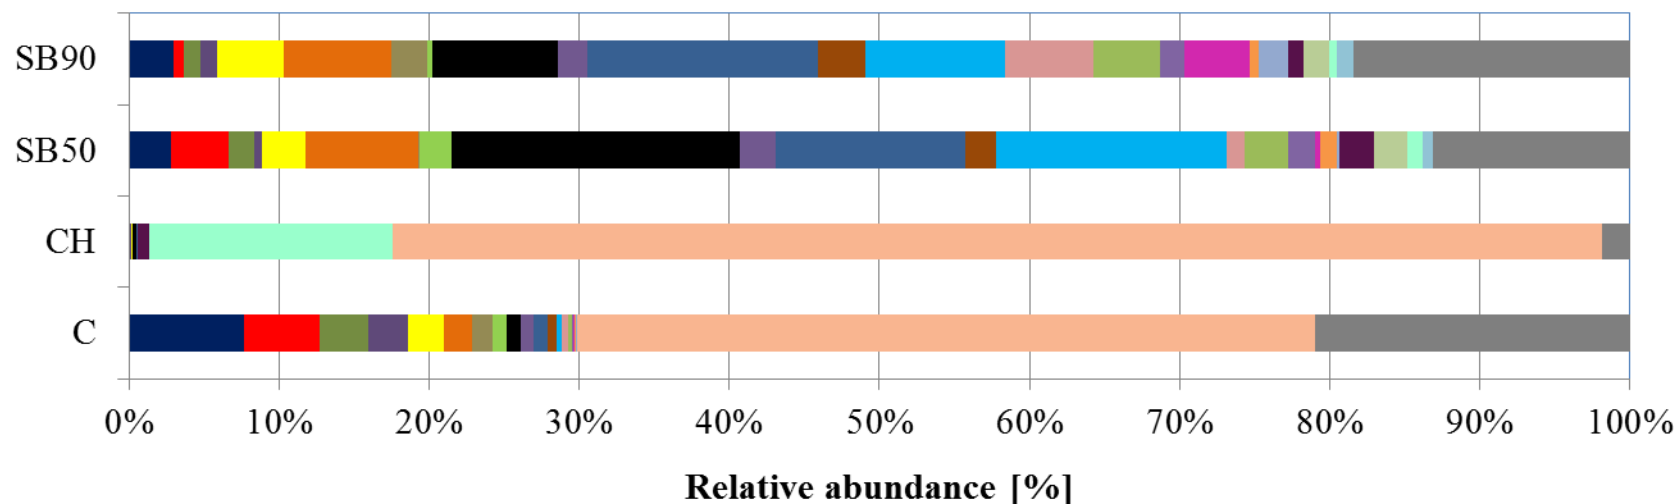

- Clostridiaceae
- Caldicoprobacteraceae
- Unclassified (Firmicutes phylum)
- Alcaligenaceae
- Xanthomonadaceae
- Phyllobacteriaceae
- Symbiobacteriaceae
- Enterococcaceae
- Other <1%
- Trueperaceae
- Flavobacteriaceae
- Thioalkalispiraceae
- Sphingobacteriaceae
- Thermoanaerobacteraceae
- Rhodanobacteraceae
- Comamonadaceae
- Unclassified (Spartobacteria class)
- Bacillaceae
- Chitinophagaceae
- Paenibacillaceae
- Thermoactinomycetaceae
- Cytophagaceae
- Sandaracinaceae
- Rhodocyclaceae
- Other >1%

Figure 5. Bacterial distributions at the family level according to the 16S sequencing for Compost (C), Coffee Husk (CH) and the final product of reactors SB50 and SB90. Only families with a relative abundance >1% in either SB50 or SB90 are depicted. Families detected with a relative abundance < 1% in these two samples are grouped as "others".

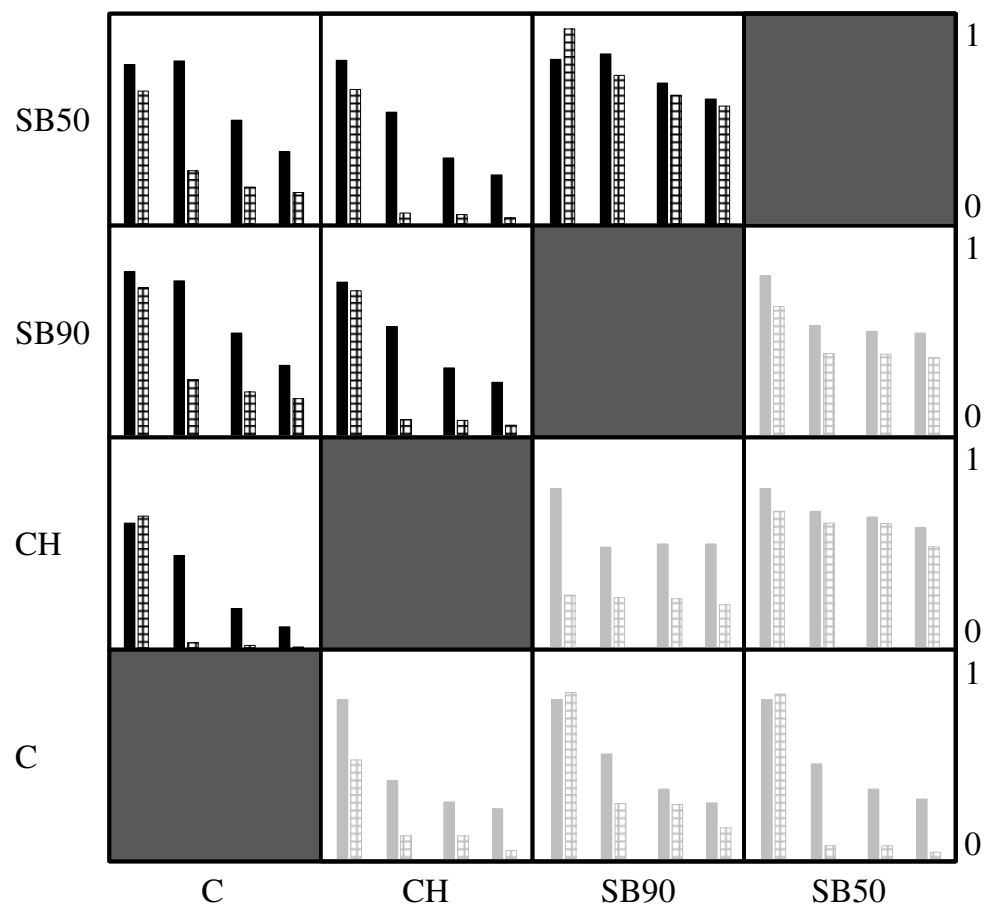


Figure 6. Sorensen's-Dice indices for prokaryotic (black) and eukaryotic (grey) microbiota associated to raw materials and final products (Compost (C), Coffee Husk (CH) and the final product of reactors SB50 and SB90). Every quadrant shows both qualitative (■, ■) and quantitative (▨, ▨) indices for all taxonomic levels (from left to right: phylum, family, genus and specie).

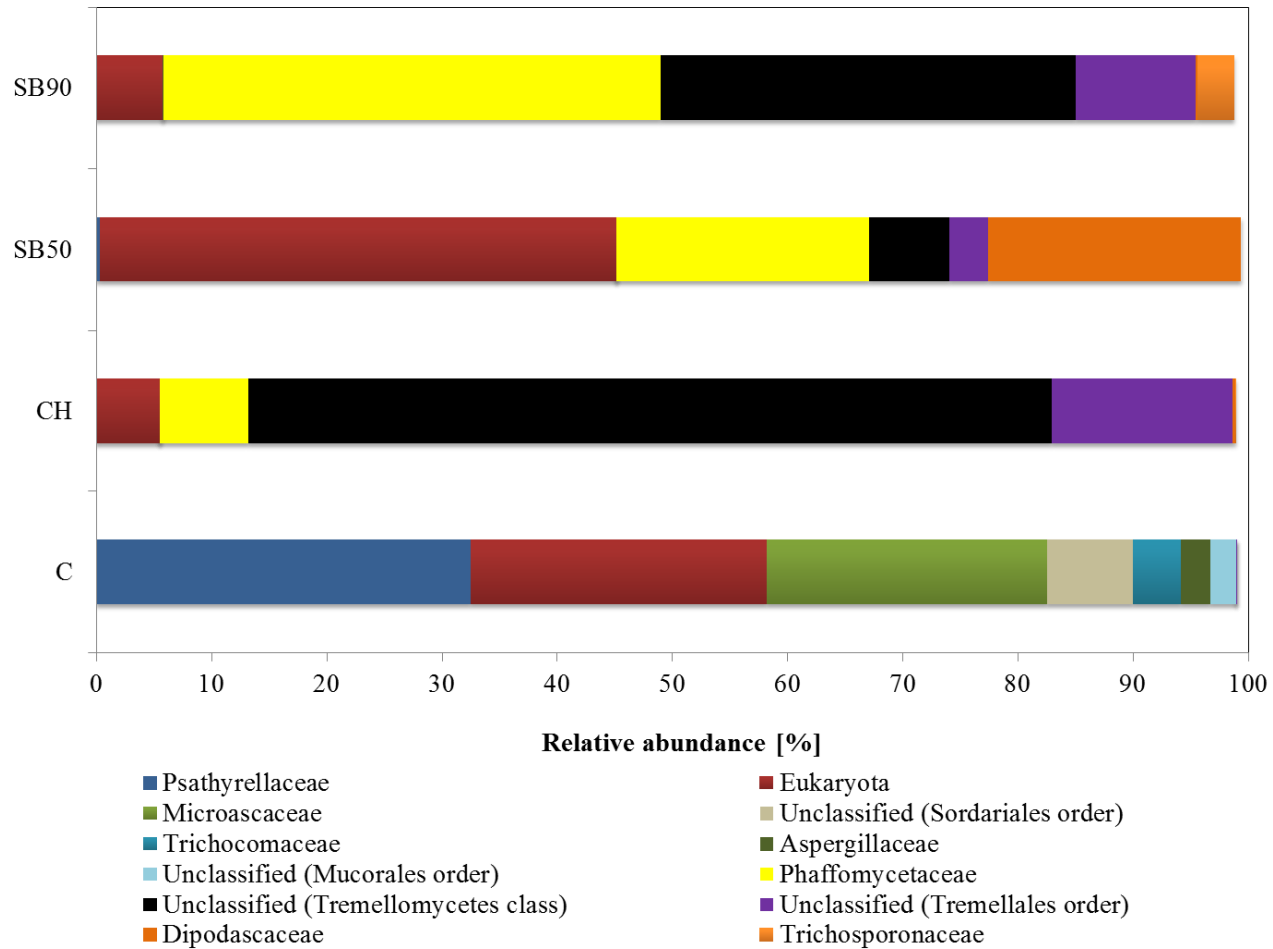


Figure 7. Identified fungal and yeasts families in Compost (C), Coffee Husk (CH) and the final product of reactors SB50 and SB90.