BIOREFINERY: A solution for a sustainable future

Part II. Analysis of two batch processes for the 1,3-propanediol production

Clapés M., Golobardes A., Portell M., Portell L., Prat C.

INTRODUCTION AND OBJECTIVE

Historically, 1,3-propanediol has been produced by chemical synthesis but its numerous disadvantages such as high pressure and temperature requirements and expensive catalysers have lead to a 1,3-propanediol production costs very high and demanding.


Alternative

Microbial conversion of raw materials to 1,3-PDO

- Using crude glycerol from the biodiesel production.
- Bacterial strain Klebsiella pneumoniae.
- Analysing two different fed-batch processes.

Objective: develop two different fed-batch processes and compare them, taking into account not only its economic analysis but also especially its environmental impact. SuperPro designer was used as a simulation tool for the development of the two processes.:

PROCESS DESCRIPTION

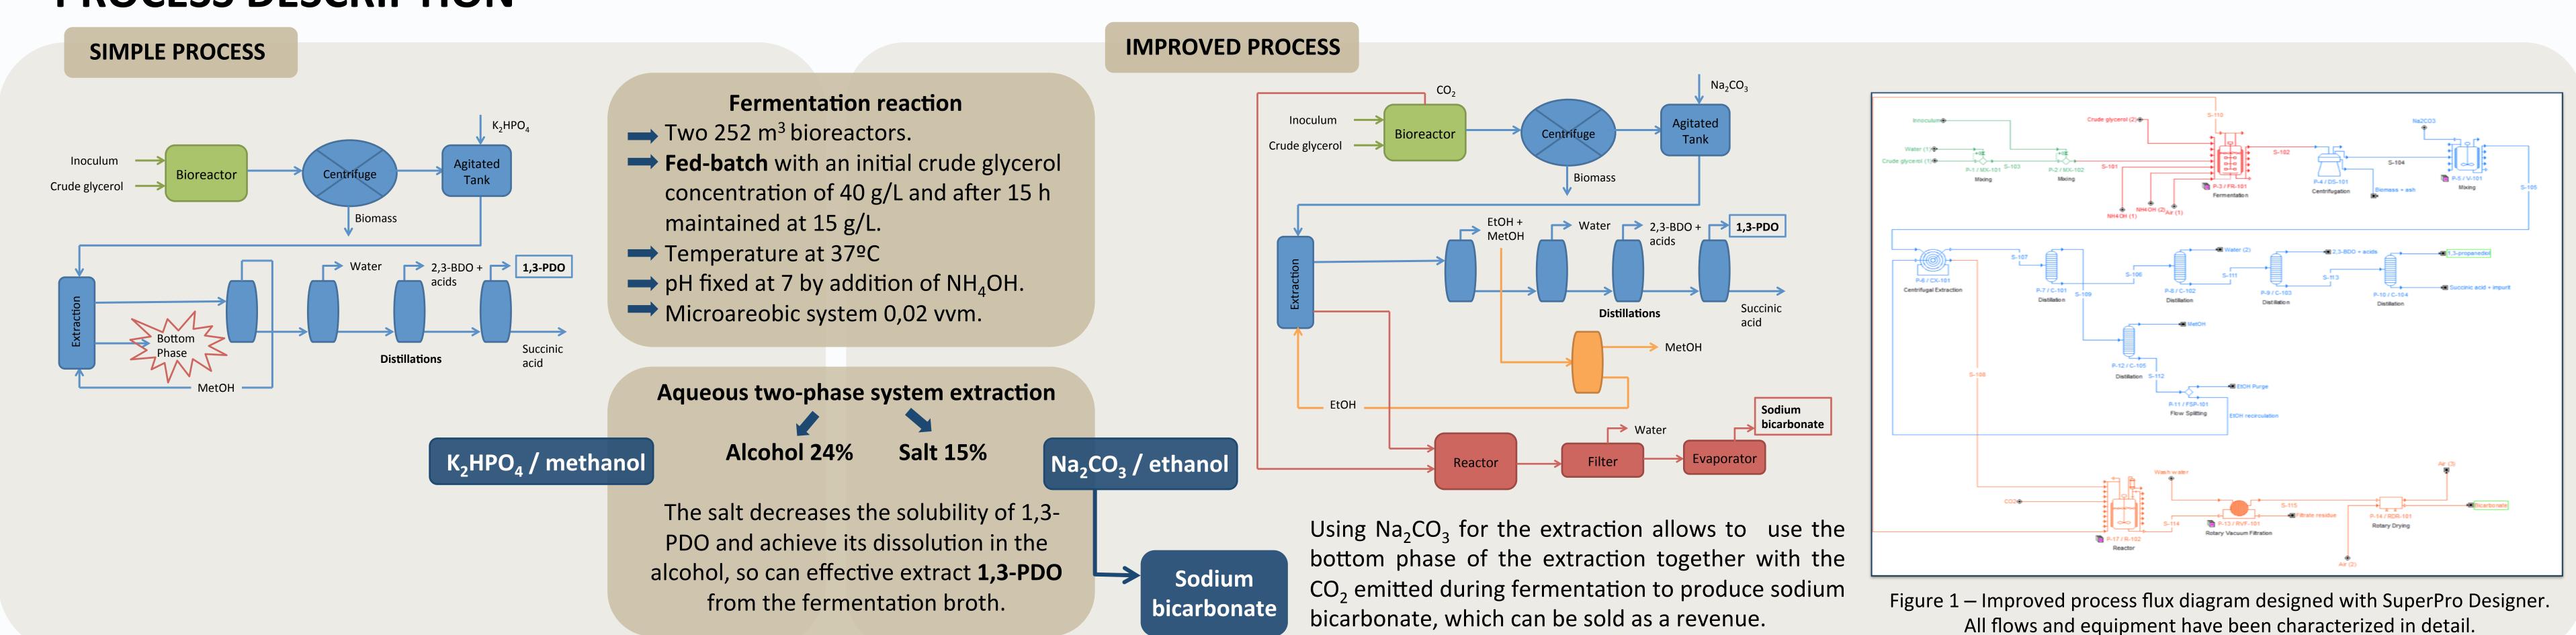

ECONOMIC ANALYSIS

SIMPLE PROCESS

PDO selling price: 60 \$/kg

Total investment (\$)	70.789.000
Annual operating cost (\$)	51.956.000
Revenues (\$/yr)	243.652.000
Unit production cost (\$/kg)	12,8
Unit production revenue (\$/kg)	60,05
Gross margin	79 %
Return on investment	171 %
Payback time	0,58 yr
NPV (7% interest) (\$)	729.459.000

The process seems to be economically feasible because the unit production cost is lower than the unit production revenue. But there are two critical points that lead to increase drastically the annual operating cost:

- Raw materials cost, due to the high amount of K₂HPO₄ that is needed for the extraction.
- Waste treatment cost, due to the high cost of the treatment that needs to be applied on the solid bottom phase of the extraction.


NOT an ECO-FRIENDLY PROCESS

IMPROVED PROCESS

Depending on the selling price, the economic feasibility of the process varies from an unfeasible process to a short payback time process:

→ 3 \$/kg PDO corresponds to a market based on PTT production.


In both cases, the **product is exactly the same**, and its high purity makes the process costs extremely high. → 60 \$/kg PDO corresponds to pharmaceutical and cosmetics market.

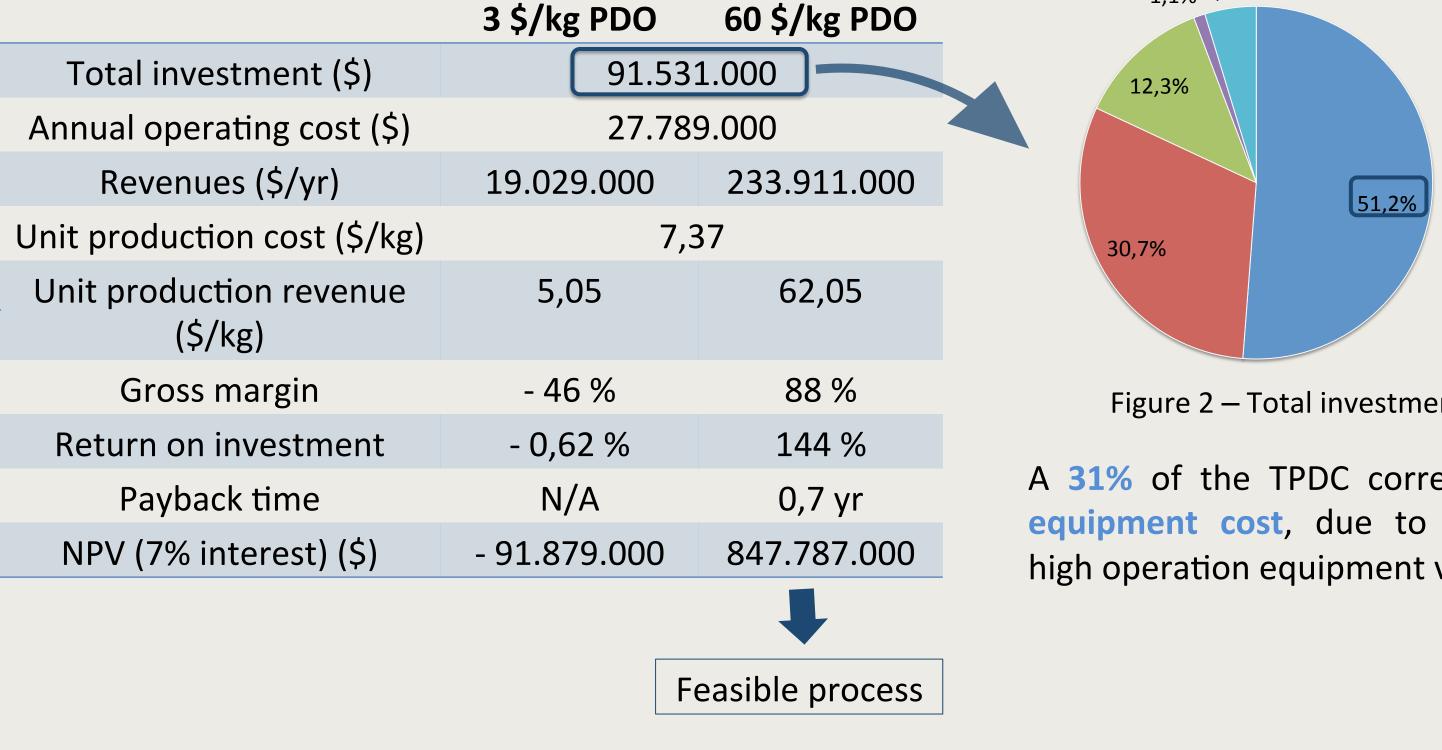

Although the main goal of this process is to produce 1,3-PDO, two other revenues are produced during the process:

- Methanol, separated from ethanol (0,3 \$(kg). → Sodium bicarbonate (0,25 \$/kg).

PDO SELLING PRICE DETERMINES THE PLANT FEASIBILITY, WHICH RESULTS TO BE FEASIBLE WHEN PDO IS SOLD AT 60 \$/kg

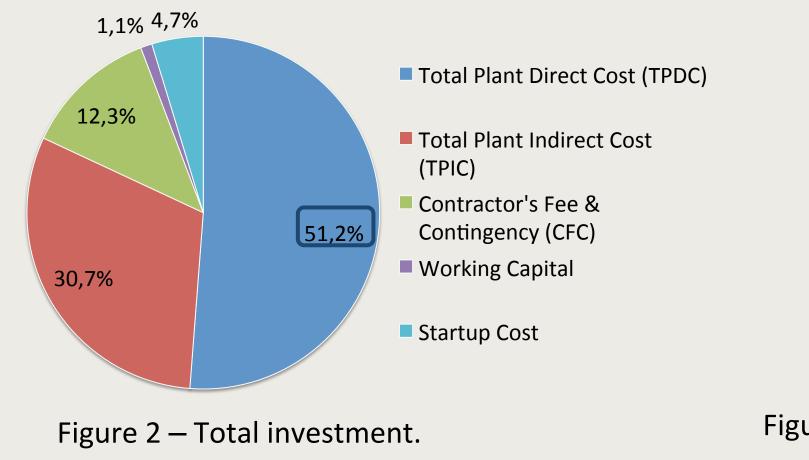

A 31% of the TPDC corresponds to the equipment cost, due to the extremely high operation equipment volume.

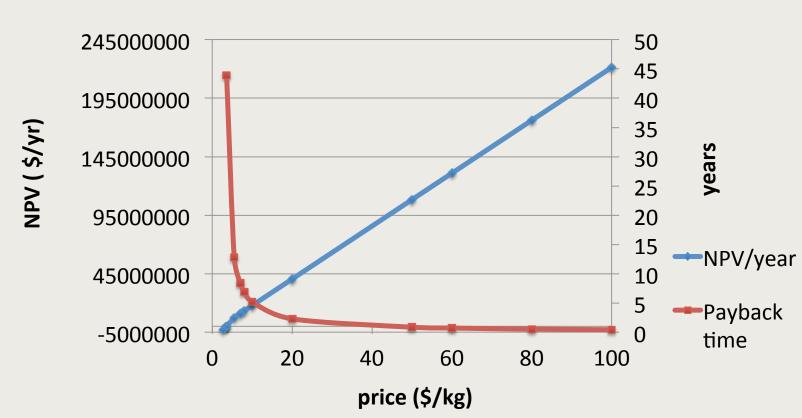


Figure 3 — Annual operating cost. . A 18,5% of the AOC corresponds to the materials cost, being the most important the salt used in the extraction (Na₂CO₃), which represents a 60% of the total material cost, followed by the crude glycerol used as a

18,5%

12,2%

58,8%

substrate.

Materials cost

Utilities

Waste treatment

Labor-Dependent

Facility-Dependent

Laboratory


Return on investment is negative when PDO is sold at 3 \$/kg. This is due to the unit production revenue is lower than the unit production cost.

When PDO is sold at 60 \$/kg, the inversion is quickly recovered and the benefit is high. This situation leads to a consideration of the PDO selling price. According to figure 3, the minimum optimal selling price is 20 \$/kg since the payback time has decreased dramatically and NPV is positive.

ENVIRONMENTAL ANALYSIS

IMPROVED PROCESS

To describe the impact that the process may cause to the environment, it is necessary to identify the process outputs and whether they are formed by toxic compounds or not:

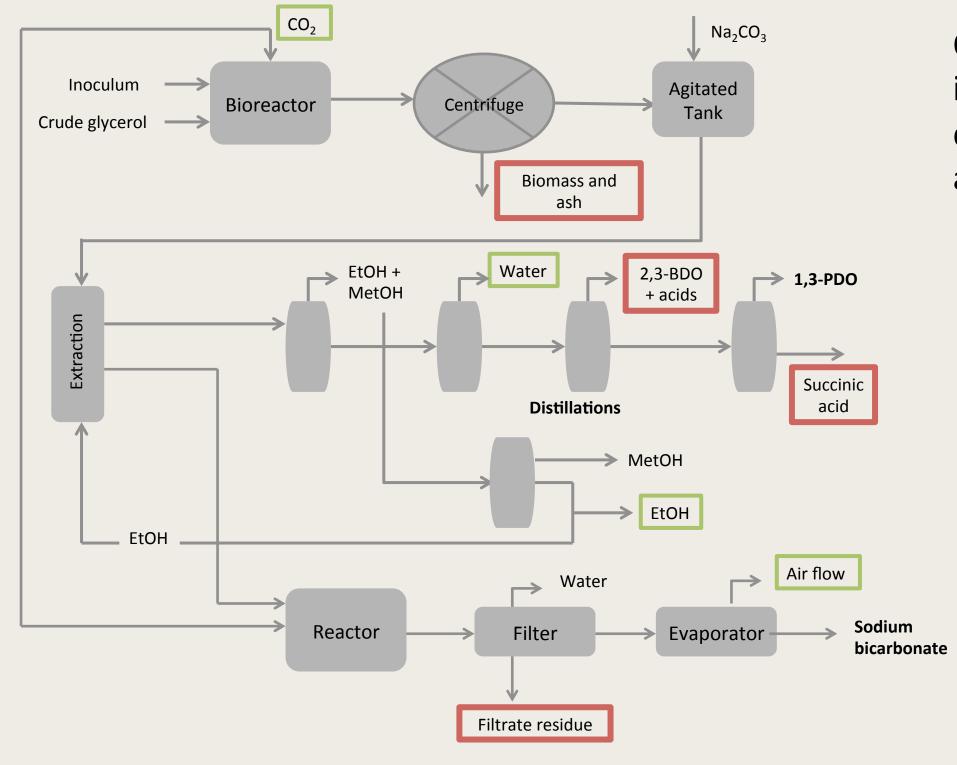

Non toxic compounds

Once the harmless outflows have been identified, it is necessary to describe its composition in order to decide which waste treatment process is going to be applied:

→ Biomass and ash: anaerobic digestion, due to its TOC and COD values.

 \rightarrow 2,3 – BDO and acids Neutralization treatment and Succinic acid and impurities anaerobic digestion.

→ Filtrate residue: wastewater treatment plant.

CONCLUSIONS

Two processes for the production of highly pure 1,3-propanediol using crude glycerol as a substrate have been described. A Klebsiella pneumoniae strain has been used as a catalyser in both reactions, leading to a product/substrate yield of 50%:

- Simple process: the bottom phase from the extraction is a solid waste with a difficult an expensive treatment, so that leads to a low feasible and no eco-friendly process.
- → Improved process:
- NO CO₂ emissions
- Low waste treatment cost

3 REVENUES **ECO-FRIENDLY**



What is next?

There are some options to consider in order to improve the production process designed:

- → Using a genetically modified *Klebsiella* strain that could tolerate even better the substrate.
- → Operating in continuous reaction mode in order to decrease the reactor volume.
- Purification of 2,3-butanediol and lactic acid, obtained as a fermentation products.

SELECTED REFERENCES

Toxic compounds

- Drozdzynska A., Leja K., Czaczyk K. "Biotechnological production of 1,3-propanediol from crude glycerol". Journal of Biotechnology, Computational Biology and Bionanotechnology, 92 (2011), p. 92-100.
- Li ZG., Sun YQ., Zheng WL., Teng H., Xiu ZL. "A novel and environment-friendly bioprocess of 1,3-propanediol fermentation integrated with aqueous two-phase extraction by ethanol/sodium carbonate system". Biochemical engineering journal, 80 (2013), p.68-75.
- Anand P., Saxena RK., Marwah RG. "A novel downstream process for 1,3-propanediol from glycerol-based fermentation". Applied microbiology and biotechonology, 90 (2011), p. 1267-1276.